
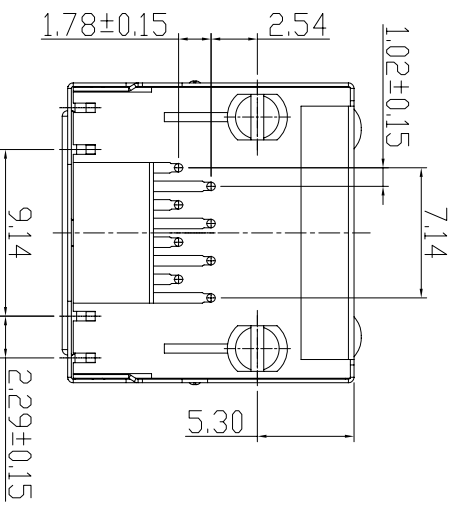
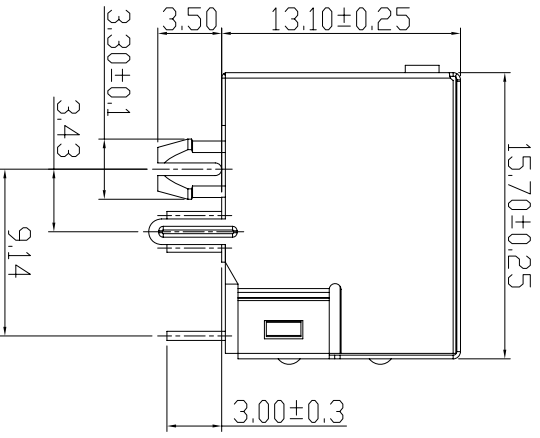


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 8P8C 带灯带壳	MU5688-XX11-GR LX

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	XSY	2015.01.09
A02		修正PCB LAYOUT	XSY	2015.07.09
A03		新增颜色选项	XSY	2016.03.09

**SPECIFICATION**

1. VOLTAGE RATING: 150 VAC RMS.
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 40 mΩ MAX
4. INSULATION RESISTANCE: 500MΩ MIN.
5. WITHSTAND VOLTAGE: AC1000V RMS 60s.
6. OPERATING TEMPERATURE: -40°C~+80°C

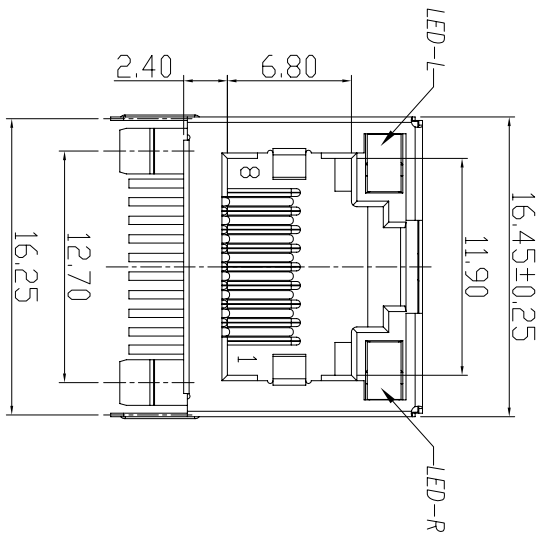

MU5688-XX11-GR LX



X	LED-L	LED-R
1	G	Y
2	Y	G
A	G	G/O

TABLE 1

X	COLOUR
B	BLACK
Y	YELLOW
U	BLUE
O	ORANGE

TABLE 2

X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating

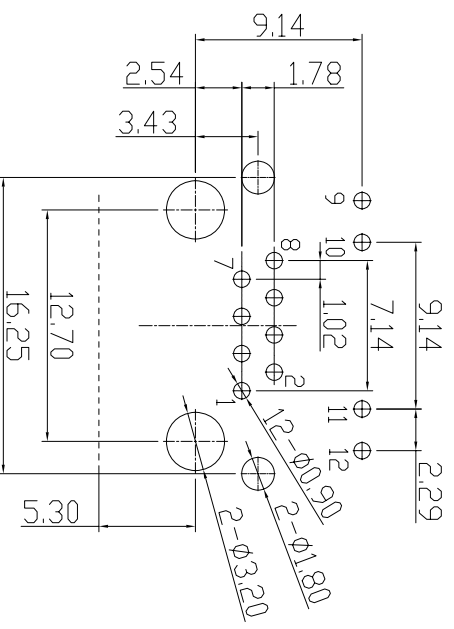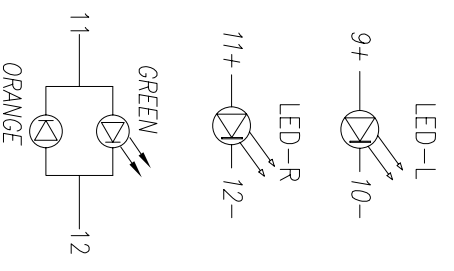

Recommend PCB Layout  
(Jack Top View)  
Tolerance: ±0.05mm  
Recommend PCB Thickness: 1.6mm

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR	Remark
e	LED-R	1	SEE TABLE 1	Tin PALTING	
d	LED-L	1	SEE TABLE 1	Tin PALTING	
c	SHELL	1	BRASS T=0.2mm	NI PALTING	
b	TERMINAL	8	PHOSPHOR BRONZE Ø0.46mm	SEE TABLE 2	
a	HOUSING	1	PBT UL94V-0	BLACK	

UNLESS OTHERWISE SPECIFIED TOLERANCES

SCALE: 1/1 UNIT: mm  
SIZE: A3 PAGE: 1 OF 1 REV: A03  
DWG. NO: WI-061-061

DECIMALS: ANGLES:  
X : ±0.5 X : ±2  
X.X : ±0.3 X.X : ±1\*  
X.XX : ±0.2

APPROVED BY: XSY  
CHECKED BY: XSY  
PREPARED BY: XSY  
DICK  
CUSTOMER COPY

**东莞市合陵电子有限公司**  
DongGuan Heling Electronic Co.,LTD