

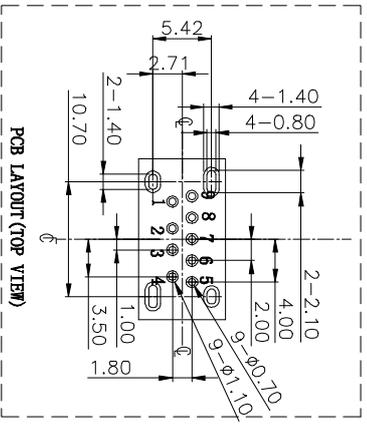



CATEGORY	DESCRIPTION	P/N #
CONNECTOR	USB 3.0 AF 长体侧插DIP	UB8SF-XXX11-XY002

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01		New Release	KELLY	2014.02.13



UB8SF-XXX11-XY002

Table 1




X	屏蔽壳材质
G	SUS
s	Steel

Table 2

X	塑胶颜色区分
B	BLACK
W	WHITE
L	BLUE

Table 3

Material & Plating	
X	Terminal Plating
0	Au 1u" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

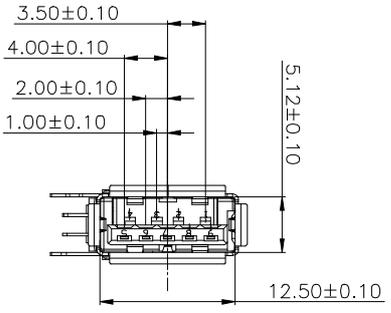

SPECIFICATIONS:
 Contact current Rating:
 1.8 Amperes for pin1&pin4,
 0.25 Amperes other contacts
 Dielectric Withstanding Voltage:AC 100V(RMS)
 Insulation resistance:100Mmegohms Minimum.
 Contact Resistance:
 30mΩ Max for pin1&pin4
 50mΩMax for other contacts
Mechanical Characteristics:
 Mating Force:35 Newtons,Minimum.
 Unmating Force:10 Newtons,Minimum.
 8N Min After Durability

MATERIAL:
 Housing: PBT
 Contact: copper alloy(T=0.25mm)
 Shell: SUS

PLATING:
 Contact: Au Plated on contact area
 Tin Plated on solder area
 Nickel underplating over all
 Shell: Nickel Plated
 operating Temperature:-55*to+85*

东莞市合陵电子有限公司
 DongGuan Heling Electronic Co.,LTD
 Connector

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	DWG.NO:
DECIMALS:	ANGLES:	SIZE: A3	PAGE:1 OF 1	REV:A01
X : ±0.5	X : ±2°	APPROVED BY	CHECKED BY	PREPARED BY
X.X : ±0.38	X.X : ±1°	TNOY	BILL	KELLY
X.XX : ±0.25		CUSTOMER COPY		